



# 25-406

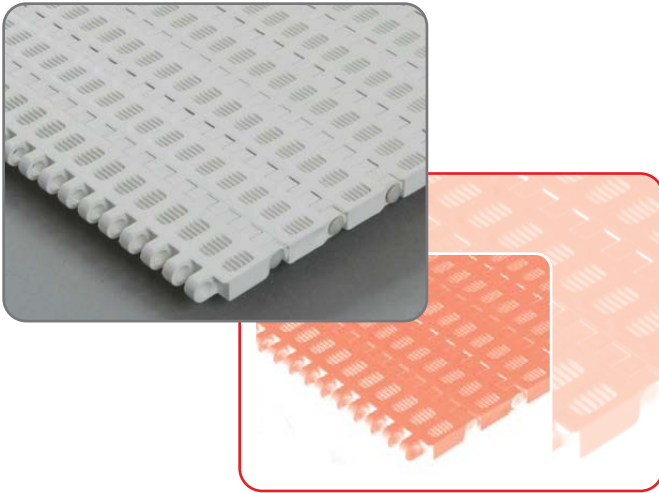

Belt surface: Perforated flat top.  
 Open area: 13%. Biggest opening 1 x 6 mm.  
 Strength: Ideal for medium weight transportation.  
 Material/colour: PE/nat, PP/white and grey.  
 Cleanability: Good.  
 Accessories: 5, 25 and 50 mm flights. 25 and 50 mm side guards. 25 and 50 mm friction flights.  
 Application: Dairy, vegetables, poultry, snacks, sweet goods and other industries that handle products requiring drainage and very small openings.  
 Width interval: 5 mm. e.g. 100 mm, 105 mm, 110 mm etc.

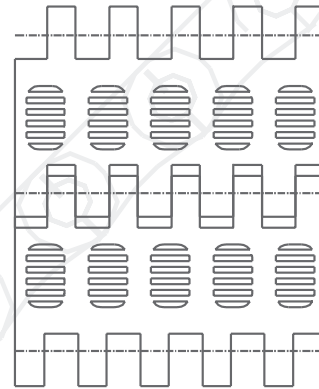

**BELT DATA**

Materials	Max. belt pull kg/m of width	Belt weight kg/m <sup>2</sup>
Polyethylene (PE)	900	6
Polypropylene (PP)	1250	6
Polyacetal (POM)	2400	8

**SPROCKET DATA**

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	54	45	36
8	70	61	52
12	104	95	86
20	169	160	151

**HUB SPECIFICATION**

Hub width 16 mm	Number of teeth			
	6Z	8Z	12Z	20Z
Round bore (mm)	20ø	20ø 25ø	25ø 30ø 40ø	25ø 30ø 40ø
Hexagon bore (mm)	24x24x24			
Square bore (mm)		25x25	25x25 40x40	25x25 40x40 60x60

