



50-400

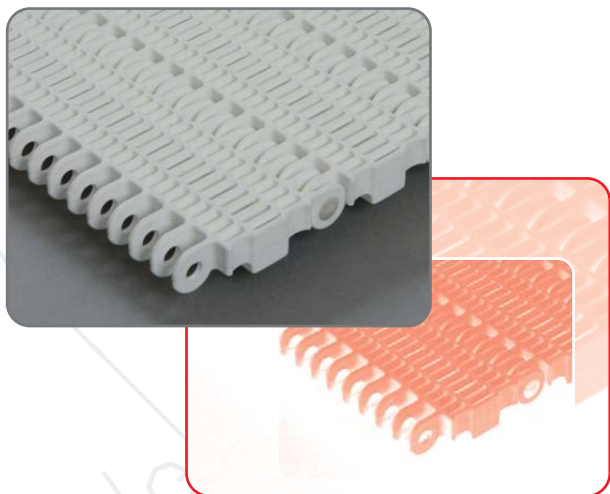

- Belt surface: Open belt with a smooth surface.
- Open area: 50%. Biggest opening 5 x 11 mm.
- Strength: The right belt for medium-heavy transportation.
- Material/colour: PE/nat, PP/white and grey. POM/blue.
- Cleanability: Excellent. FSIS
- Accessories: 25, 50 and 75 mm flights. 50, 75, 100 and 150 mm side guards. Hold-down. Extended and bent flights. Flights fitted with a round top.
- Application: Cooling/freezing belts in the seafood, bakery, vege-table and meat industries and other areas where large air-flow combined with a small open area is required.
- Width interval: 7 mm. e.g. 100 mm, 107 mm, 114 mm etc.

BELT DATA

Materials	Max. belt pull kg/m of width	Belt weight kg/m ²
Polyethylene (PE)	1640	6
Polypropylene (PP)	2160	6
Polyacetal (POM)	3240	8



SPROCKET DATA

No. of teeth Z	A=Outside diameter (mm)	B=Pitch diameter (mm)	C=Inside diameter (mm)
6	117	101	85
8	149	133	117
10	180	164	148
12	211	195	179
16	275	259	243

HUB SPECIFICATION

Hub width 40 mm	Number of teeth				
	6Z	8Z	10Z	12Z	16Z
Round bore (mm)	25ø	25ø			
	30ø	30ø	30ø	30ø	
	40ø	40ø	40ø	40ø	
			50ø	50ø	
			60ø	60ø	60ø
Square bore (mm)	38x38	30x30	38x38	40x40	40x40
	40x40	38x38	40x40	50x50	50x50
		40x40	60x60	60x60	60x60
					65x65
					80x80

